



SR Downlight
MiniSpot Series

SUMMARY

| | | | | |
|--------------------------------------|----------------------------------|--|-------------------------------------|---------------|
| diameter T25: Ø25mm T40: Ø40mm | height T25: 37mm T40: 44mm | aperture T25: Ø14mm T40: Ø30mm | cut out T25: Ø20mm T40: Ø35mm | trim |
| IP IP40 | power T25: 1.5W T40: 2.0W | beam T25: 8° 18° 32° T40: 8° 22° 38° | color | CRI Ra 90+ |

FEATURES

- Pinhole style downlight with very small aperture (Ø14/30mm) to pinpoint or accentuate
- Deep recessed lens and optimal glare control
- Easy installation and maintenance
- Wide range of beam angle selections, T25: 8°/18°/32°, T40: 8°/22°/38°
- Long lifetime, 50,000 hours

ELECTRICAL

Supply voltage: 220-240V~

System power, total supply current and voltage:

| | Model | W | mA | V(typ) |
|------------|-------|-----|-----|--------|
| SRMINISPOT | T25 | 1.5 | 350 | 3 |
| | T40 | 2.0 | 500 | |

LIGHT OUTPUT

CRI/CCT: 927, 930, 940

Light distribution: symmetric

Beam angle & luminaire lumen output:

| | Model | Beam Angle | Flux (lm) |
|------------|-------------|------------|-----------|
| | | | 930 |
| SRMINISPOT | T25 (@1.5W) | 8° | 68 |
| | | 18° | 82 |
| | | 32° | 79 |
| SRMINISPOT | T40 (@2.0W) | 8° | 99 |
| | | 22° | 119 |
| | | 38° | 92 |

DIMMING OPTION



MECHANICAL

IP: IP40

Cut out: Ø20/35mm

Mounting: ceiling recessed

Material: aluminum die cast

Color:

| |
|------|
| trim |
| |

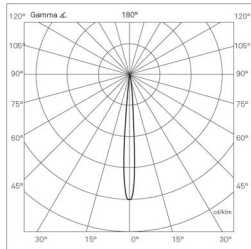
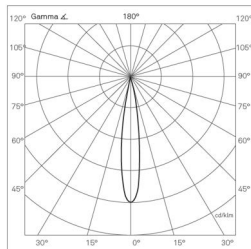
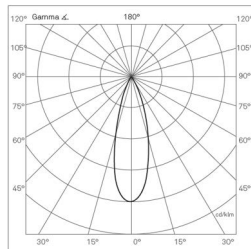
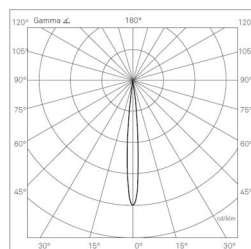
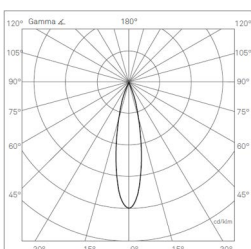
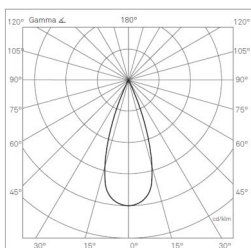
LIFETIME, WARRANTY & COMPLIANCE

Warranty: 3 years


Lifetime: L70/B50@50,000 hours

Compliance: CE

PHOTOMETRY


| T25 930 8° |  | <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1471</td> <td>0.15</td> </tr> <tr> <td>2</td> <td>368</td> <td>0.30</td> </tr> <tr> <td>3</td> <td>163</td> <td>0.45</td> </tr> <tr> <td>I (cd)</td> <td>1512</td> <td></td> </tr> </tbody> </table> | H(m) | E(lx) | D(m) | 1 | 1471 | 0.15 | 2 | 368 | 0.30 | 3 | 163 | 0.45 | I (cd) | 1512 | |
|-------------|---|--|------|-------|------|---|------|------|---|-----|------|---|-----|------|--------|------|--|
| H(m) | E(lx) | D(m) | | | | | | | | | | | | | | | |
| 1 | 1471 | 0.15 | | | | | | | | | | | | | | | |
| 2 | 368 | 0.30 | | | | | | | | | | | | | | | |
| 3 | 163 | 0.45 | | | | | | | | | | | | | | | |
| I (cd) | 1512 | | | | | | | | | | | | | | | | |
| T25 930 18° |  | <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>786</td> <td>0.31</td> </tr> <tr> <td>2</td> <td>197</td> <td>0.62</td> </tr> <tr> <td>3</td> <td>87</td> <td>0.93</td> </tr> <tr> <td>I (cd)</td> <td>792</td> <td></td> </tr> </tbody> </table> | H(m) | E(lx) | D(m) | 1 | 786 | 0.31 | 2 | 197 | 0.62 | 3 | 87 | 0.93 | I (cd) | 792 | |
| H(m) | E(lx) | D(m) | | | | | | | | | | | | | | | |
| 1 | 786 | 0.31 | | | | | | | | | | | | | | | |
| 2 | 197 | 0.62 | | | | | | | | | | | | | | | |
| 3 | 87 | 0.93 | | | | | | | | | | | | | | | |
| I (cd) | 792 | | | | | | | | | | | | | | | | |
| T25 930 32° |  | <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>237</td> <td>0.57</td> </tr> <tr> <td>2</td> <td>59</td> <td>1.14</td> </tr> <tr> <td>3</td> <td>26</td> <td>1.71</td> </tr> <tr> <td>I (cd)</td> <td>239</td> <td></td> </tr> </tbody> </table> | H(m) | E(lx) | D(m) | 1 | 237 | 0.57 | 2 | 59 | 1.14 | 3 | 26 | 1.71 | I (cd) | 239 | |
| H(m) | E(lx) | D(m) | | | | | | | | | | | | | | | |
| 1 | 237 | 0.57 | | | | | | | | | | | | | | | |
| 2 | 59 | 1.14 | | | | | | | | | | | | | | | |
| 3 | 26 | 1.71 | | | | | | | | | | | | | | | |
| I (cd) | 239 | | | | | | | | | | | | | | | | |
| T40 930 8° |  | <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3607</td> <td>0.14</td> </tr> <tr> <td>2</td> <td>902</td> <td>0.28</td> </tr> <tr> <td>3</td> <td>401</td> <td>0.42</td> </tr> <tr> <td>I (cd)</td> <td>3614</td> <td></td> </tr> </tbody> </table> | H(m) | E(lx) | D(m) | 1 | 3607 | 0.14 | 2 | 902 | 0.28 | 3 | 401 | 0.42 | I (cd) | 3614 | |
| H(m) | E(lx) | D(m) | | | | | | | | | | | | | | | |
| 1 | 3607 | 0.14 | | | | | | | | | | | | | | | |
| 2 | 902 | 0.28 | | | | | | | | | | | | | | | |
| 3 | 401 | 0.42 | | | | | | | | | | | | | | | |
| I (cd) | 3614 | | | | | | | | | | | | | | | | |
| T40 930 22° |  | <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>691</td> <td>0.39</td> </tr> <tr> <td>2</td> <td>173</td> <td>0.78</td> </tr> <tr> <td>3</td> <td>77</td> <td>1.17</td> </tr> <tr> <td>I (cd)</td> <td>692</td> <td></td> </tr> </tbody> </table> | H(m) | E(lx) | D(m) | 1 | 691 | 0.39 | 2 | 173 | 0.78 | 3 | 77 | 1.17 | I (cd) | 692 | |
| H(m) | E(lx) | D(m) | | | | | | | | | | | | | | | |
| 1 | 691 | 0.39 | | | | | | | | | | | | | | | |
| 2 | 173 | 0.78 | | | | | | | | | | | | | | | |
| 3 | 77 | 1.17 | | | | | | | | | | | | | | | |
| I (cd) | 692 | | | | | | | | | | | | | | | | |
| T40 930 38° |  | <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>250</td> <td>0.66</td> </tr> <tr> <td>2</td> <td>63</td> <td>1.32</td> </tr> <tr> <td>3</td> <td>28</td> <td>1.98</td> </tr> <tr> <td>I (cd)</td> <td>251</td> <td></td> </tr> </tbody> </table> | H(m) | E(lx) | D(m) | 1 | 250 | 0.66 | 2 | 63 | 1.32 | 3 | 28 | 1.98 | I (cd) | 251 | |
| H(m) | E(lx) | D(m) | | | | | | | | | | | | | | | |
| 1 | 250 | 0.66 | | | | | | | | | | | | | | | |
| 2 | 63 | 1.32 | | | | | | | | | | | | | | | |
| 3 | 28 | 1.98 | | | | | | | | | | | | | | | |
| I (cd) | 251 | | | | | | | | | | | | | | | | |

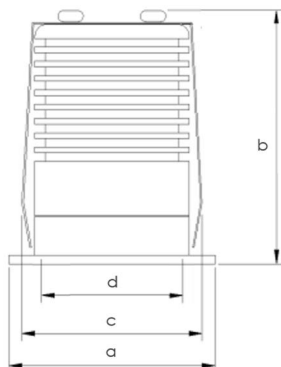DIMENSION



| | Model | Øa (mm) | b (mm) | Øc (mm) | Ød (mm) |
|------------|-------|---------|--------|---------|---------|
| SRMINISPOT | T25 | 25 | 37 | 20 | 14 |
| | T40 | 40 | 44 | 35 | 30 |

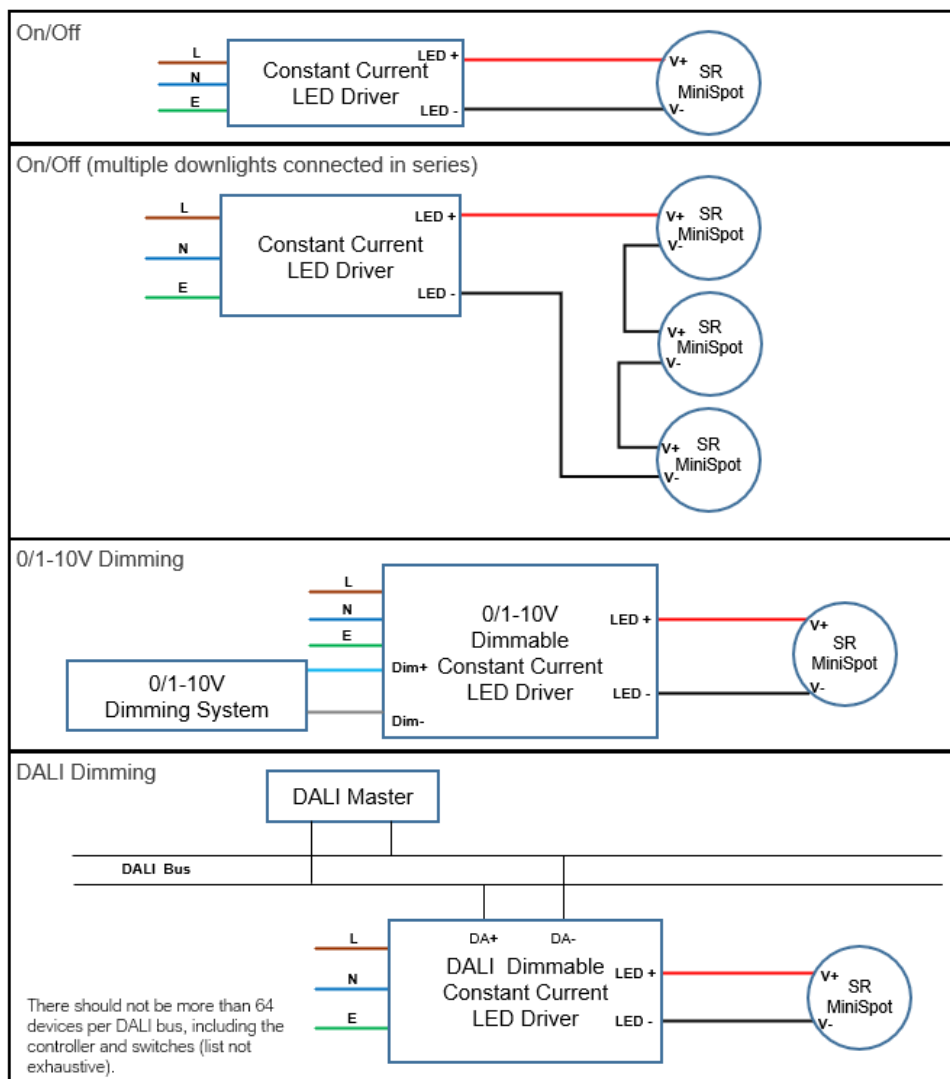CONNECTION



Consult your local sales team for other control protocols, e.g., DMX.



ORDERING INFORMATION

Select one component from each column to specify a complete ordering code

| SR MiniSpot | Model | CRI/CCT | Beam Angle [†] | IP | Trim Color * |
|-------------|------------|-------------------|-------------------------|----|--------------|
| SRMINISPOT | T25 T40 | 927 930 940 | NB MB WB | 40 | B W |

Example: SRMINISPOT-T25-930-18D-40-W refers to SR MiniSpot Series, Model T25, CRI Ra90+, CCT 3000K, beam angle 18°, IP40, white trim finishing.

| Beam Angle [†] | Description | |
|-------------------------|-------------|-----|
| | T25 | T40 |
| NB | 8° | 8° |
| MB | 18° | 22° |
| WB | 32° | 38° |

Disclaimer: Data might vary due to equipment tolerance. Manufacturer reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice.